

LANMF61862

Installation Instructions

Mud Flaps for 4xxR & 6xxR JD Sprayers with Wide Fenders (KK61862)

(1 Pair)

LANKOTA®


270 West Park Avenue

Huron, SD 57350

866-526-5682

Numerical Parts List

Part Numbers	Description	Qty
LANMF30	Sprayer Mud Flap Mount	2
LANMF09	Mud Flap Clamp Plate	2
LANMF10	Sprayer Mud Flap (31x24)	2
LANMF26	Large Stainless Washer	4
LANMFBH1	5/16" Mud Flap Bag of Hardware	3
LANF05SP	5/16" Stainless Flat Washer	10
LANFH8NC	5/16" Stainless Top Lock Nut	6
LANF06F3	5/16" x 1" Stainless Hex Bolt	6

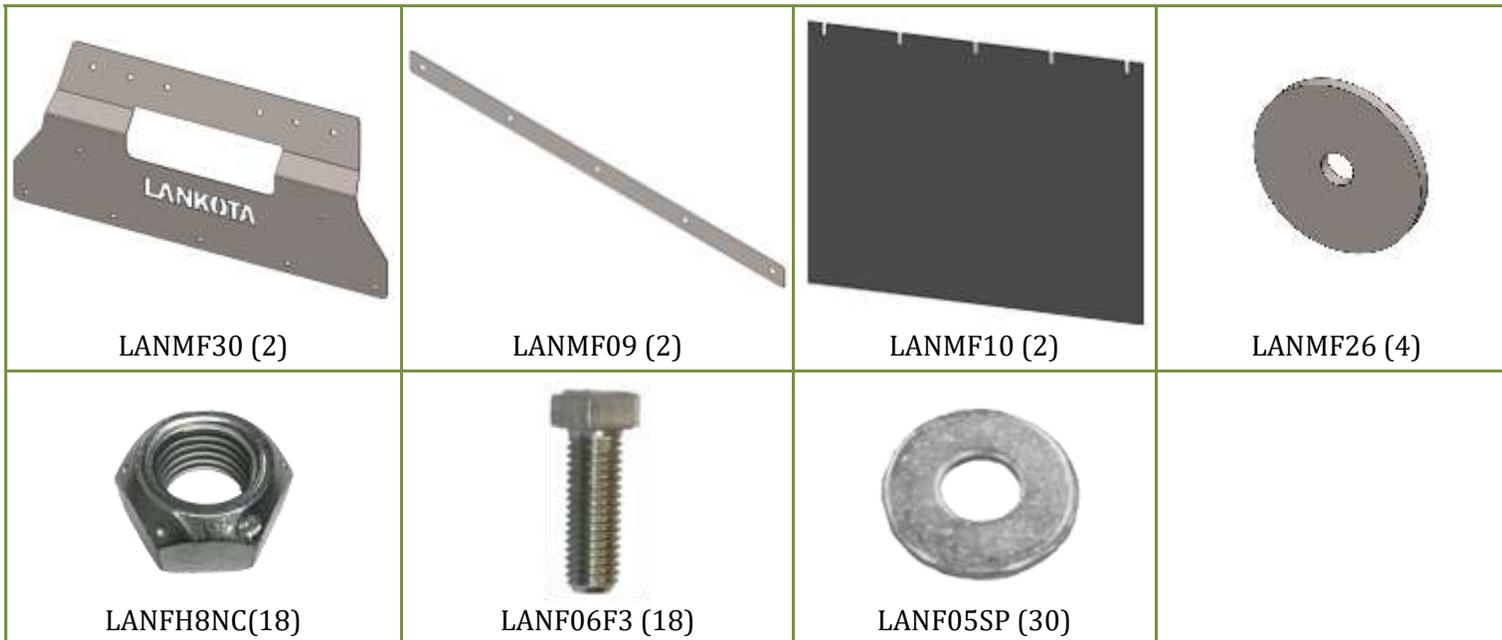

Kit Installation



Figure 1

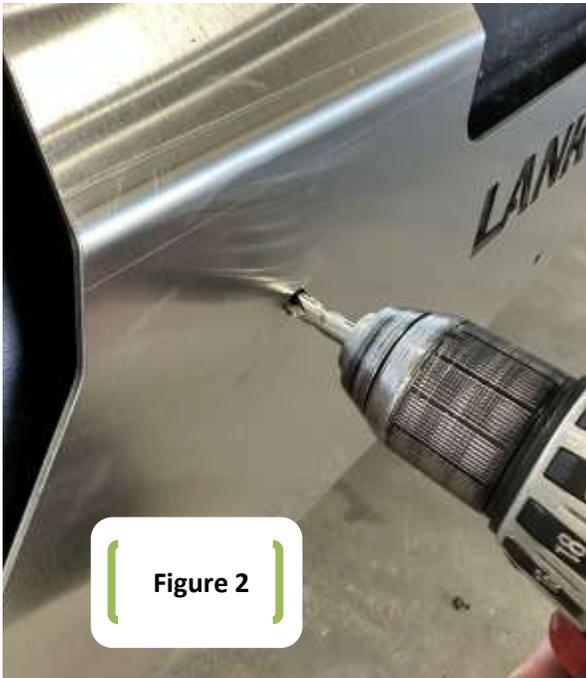


Figure 2



Figure 3

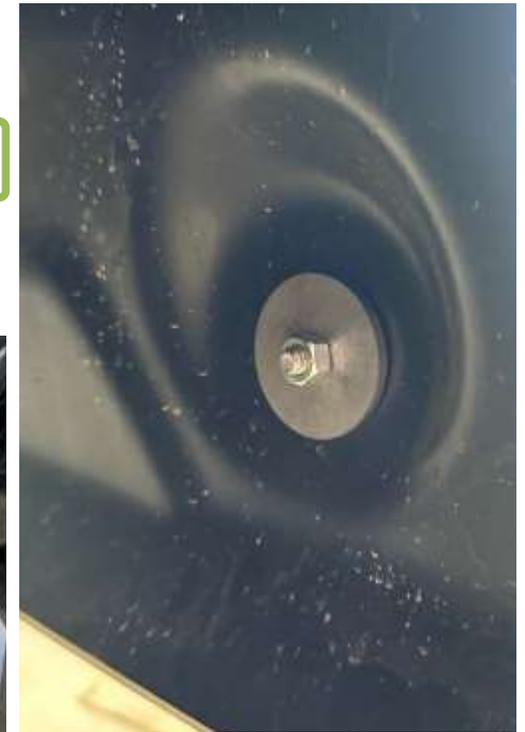


Figure 4

Refer to Figures 1 - 4

1. Remove the hardware and marker plate from the rear mount point of the fender.
2. Slide the original hardware through the mud flap mount (LANMF30), fender, backing plate and the fender bracket and tighten.
3. Using a 11/32" drill bit, through the shown holes, drill holes in the fender.
4. Push a 5/16" bolt with a washer through each hole.
5. Secure them in place with a large washer (LANMF26) and a 5/16" top lock nut.

Kit Installation

Refer to Figures 5 & 6

4. Mount the mud flap (LANMF10) to the mount with the 5/16" hardware and clamp plate (LANMF09).
5. Tighten all hardware.
6. Repeat on other wheel.

Figure 6

Figure 5



WARRANTY STATEMENT

Lankota Warranty only covers products produced by LANKOTA and does not cover parts made and/or sold by other aftermarket manufacturers, or the original manufacturer, or that were part of the original equipment's construction.